

Xcel

WOBBLERS®



High-Angle 24°

Senninger's Xcel-Wobbler maximizes the area of coverage. Its unique off-center rotary-action provides extremely uniform coverage at low pressures with a very low evaporative loss.


- New balanced design produces smooth, stable performance
- Only one moving part for longer life
- Built for strength and durability using high-impact engineering-grade thermoplastics, no metal parts
- Inlet sizes: 1/2" or 3/4" NPT male
- Flow rates: 0.78 to 7.64 gpm (0.05 to 0.47 L/s)
- Two-year warranty on materials, workmanship AND performance



The high-angle Xcel-Wobbler provides a maximized area of coverage



Mid-Angle 18°

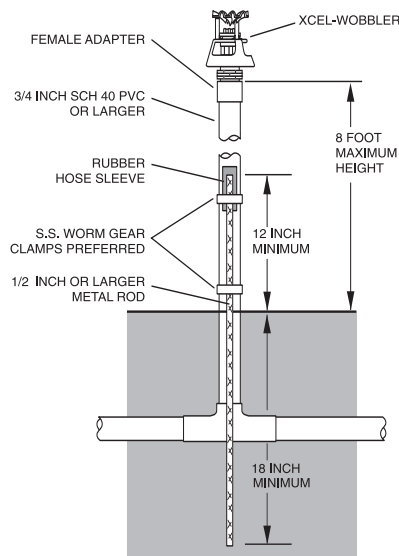

SPRINKLER BASE PRESSURE	U.S. - Diameter (feet) at 1.5 ft height					METRIC - Diameter (meters) at 0.5m height						
	(psi)	10	15	20	25	30	(bar)	0.75	1.0	1.5	2.0	
#6 Nozzle - Gold (3/32")												
Flow (gpm)	0.78	0.95	1.10	1.23	1.35							
High-Angle	34.0	39.5	42.5	43.5	44.0							
Mid-Angle	34.0	39.0	42.0	43.5	44.0							
#7 Nozzle - Lime (7/64")												
Flow (gpm)	1.06	1.30	1.50	1.68	1.84							
High-Angle	35.0	40.5	43.0	44.5	45.0							
Mid-Angle	34.5	39.5	43.0	44.0	44.5							
#8 Nozzle - Lavender (1/8")												
Flow (gpm)	1.40	1.71	1.98	2.21	2.42							
High-Angle	36.0	41.5	44.0	45.5	46.0							
Mid-Angle	35.0	40.0	43.5	44.5	45.0							
#9 Nozzle - Grey (9/64")												
Flow (gpm)	1.80	2.20	2.54	2.84	3.11							
High-Angle	37.0	42.5	45.0	46.5	47.0							
Mid-Angle	35.5	40.5	44.0	45.0	45.5							
#10 Nozzle - Turquoise (5/32")												
Flow (gpm)	2.22	2.72	3.14	3.51	3.85							
High-Angle	38.0	43.5	46.0	47.5	48.0							
Mid-Angle	36.0	41.0	44.5	45.5	46.0							
#11 Nozzle - Yellow (11/64")												
Flow (gpm)	2.69	3.30	3.81	4.26	4.67							
High-Angle	39.0	44.5	47.0	48.5	49.0							
Mid-Angle	36.5	41.5	45.0	46.0	46.5							
#12 Nozzle - Red (3/16")												
Flow (gpm)	3.23	3.96	4.57	5.11	5.60							
High-Angle	40.0	45.5	48.0	49.5	50.0							
Mid-Angle	37.0	42.0	45.5	46.5	47.0							
#13 Nozzle - White (13/64")												
Flow (gpm)	3.80	4.65	5.38	6.01	6.59							
High-Angle	41.0	46.5	49.0	50.5	51.0							
Mid-Angle	37.5	42.5	46.0	47.0	47.5							
#14 Nozzle - Blue (7/32")												
Flow (gpm)	4.40	5.39	6.23	6.97	7.64							
High-Angle	42.0	47.5	50.0	51.0	51.5							
Mid-Angle	38.0	43.0	46.5	47.5	48.0							

Stream heights range from 2.5 - 5.5 ft (0.8 - 1.7 m) above nozzle based on pressure and nozzle size.



Telephone: 407-877-5655 • Fax: 407-905-8249 • Int'l Fax: 407-905-8239
 Web: www.senninger.com • E-Mail: info@senninger.com